

# XS-1000

## 155 Mbps ATM/POS & GE Interface

### Applications

- ▶ 3G RNC, MSC & SGSN
- ▶ Voice over Packet
- ▶ Video Streaming
- ▶ Broadband Networks
- ▶ ATM to IP Gateways
- ▶ IPv4 to IPv6 Gateways

### Main Features

- ▶ ATM AAL0, AAL1, AAL2 & AAL5
- ▶ IP version 4 and 6
- ▶ OC-3 / STM-1
- ▶ 10/100/1000 Ethernet with Automatic Selection of Fiber or Copper Interface
- ▶ PICMG® 2.15 PT4MC
- ▶ WinPath™ Network Processor
- ▶ On-board 64-bit MIPS 5Kc™
- ▶ On-board Switching
- ▶ 384 MB SDRAM
- ▶ 16 MB Flash EPROM
- ▶ 8 KHz Tx and Rx Ref. Clock
- ▶ SFP Optical Transceivers
- ▶ Linux and VxWorks®



XS-1000 is the second member of a family of PCI Telecom Mezzanine Card (PTMC) which offers high-end ATM and IP services at an attractive price. XS-1000 provides termination, switching and interworking capabilities from any port to any port.

XS-1000 performance and features are ideally suited for applications such as Wireless networking, Voice over Packet, Internet access, Video streaming, and next generation networks.

Using the state of the art Wintegra™'s WinPath™ Network Processor, XS-1000 is the perfect interface to handle both ATM and IP simultaneously.

XS-1000 on-board 64-bit MIPS processor can run advanced protocols (e.g. 3GPP, SS7, ATM, VoIP) while the Network Processor handles all the data path.

Providing 2.4 Gbps aggregate throughput, XS-1000, features an OC-3 / STM-1 port and a 10 BASE-T/100 BASE-TX/1000 BASE-T/1000 BASE-X port with automatic selection between the optical and electrical interface.

Compliant with IEEE 1386.1 PCI Mezzanine card (PMC) and PICMG 2.15 PCI Telecom Mezzanine Card (PTMC), the XS-1000 can be used in cPCI, cPSB, AdvancedTCA™, VME, PC, and proprietary applications.

XS-1000 architecture allows to bypass the bottleneck of current systems by handling all the processing on-board and performing segmentation and reassembly locally, which not only allows to offload the CPU on the carrier board but also optimizes bus transfers while doing termination.

Xalyo Systems  
Grenier 9  
CH 1291 Commugny  
Tel: +41 22 776 61 77  
Fax: +41 22 776 61 75  
Email: [info@xalyo.com](mailto:info@xalyo.com)  
Web: [www.xalyo.com](http://www.xalyo.com)

XALYO SYSTEMS

## ATM

- ▶ AAL0, AAL1, AAL2 & AAL5 **1**
- ▶ ATM cell switching
- ▶ AAL2 CID switching
- ▶ Traffic management as per TM 4 .1: CBR, VBR, GFR and UBR
- ▶ Per VC queueing
- ▶ Dual leaky bucket policing
- ▶ Full UNI/NNI VPI/VCI range
- ▶ OAM F4 and F5 as per ITU-T I.610

## PT4MC

- ▶ PICMG® 2.15 compliant **3**
- ▶ UTOPIA L2 @ 50 MHz
- ▶ 8 or 16-bit data bus interface
- ▶ Master and slave configuration
- ▶ Cell size from 52 to 65 octets
- ▶ 8 KHz Tx and Rx reference clock
- ▶ Serial port

## Network Processor

- ▶ Wintegra™ WinPath™ @ 200 MHz
- ▶ 128 MBytes Packet SDRAM **4**
- ▶ 128 MBytes Parameter SDRAM
- ▶ 64-bit / 100 MHz SDRAM
- ▶ MIPS 5Kc™ CPU @ 200 MHz
- ▶ 4 WinGines
- ▶ Communication throughput up to 2.4 Gbps
- ▶ Handles more than 18 data path protocols to date
- ▶ For more details see [www.wintegra.com](http://www.wintegra.com)


## Interworking

- ▶ IP routing and forwarding over ATM (RFC 1483/2684/1577)
- ▶ IP routing and forwarding over PPP (RFC 1661)
- ▶ Multiple fields classification and DiffServ (RFC 2474/2475)
- ▶ MPLS tagging/detagging
- ▶ L2 interworking between ATM and Ethernet
- ▶ Interworking at 750'000 PPS

## IP

- ▶ IPv4 and IPv6 **2**
- ▶ PPP support
- ▶ HDLC support up to OC-12 rates
- ▶ Parsing of PPP over HDLC frames (RFC 2615 and RFC 1662)
- ▶ Packet scheduling

## Block Diagram

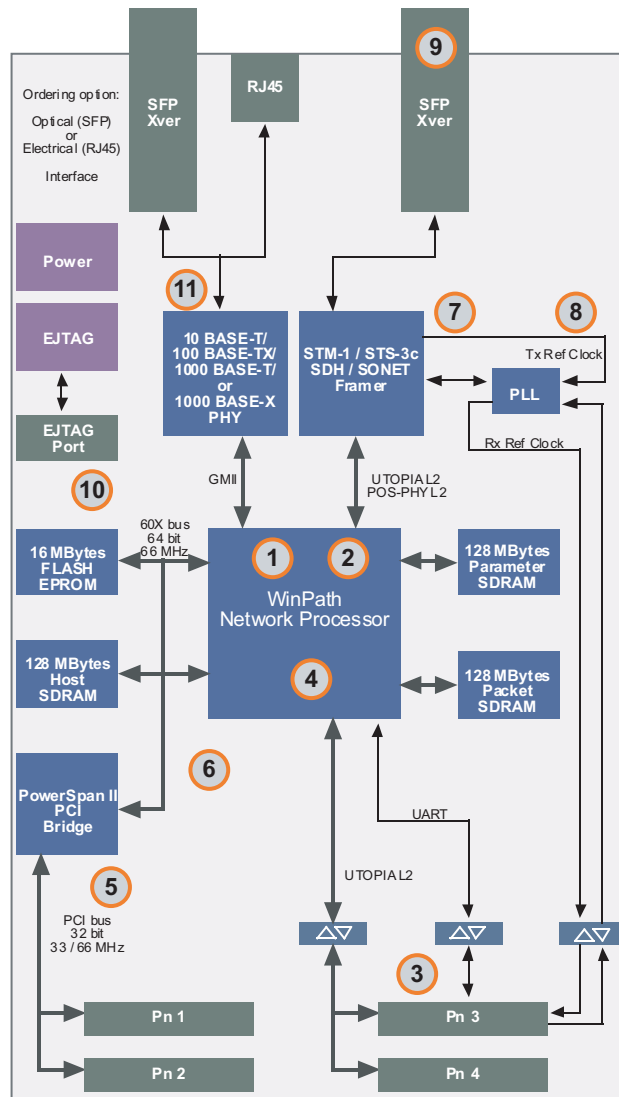

# XS-1000

## 155 Mbps ATM/POS & GE Interface

### System busses

- PCI bus **5**
- ▶ PCI 2.2 Specification compliant
  - ▶ 32-bit interface
  - ▶ 33 / 66 MHz operation
  - ▶ 3.3 V and 5 V signaling
  - ▶ Intelligent I2O messaging

- Host bus **6**
- ▶ PPC 60X @ 66 MHz
  - ▶ 64-bit interface
  - ▶ 128 MBytes Host Memory
  - ▶ 16 MBytes Flash EPROM

### Physical Layer


- ATM/POS **7**
- ▶ STM-1 / STS-3c
  - ▶ Duplex 155.52 Mbps port
  - ▶ ATM (ITU I.432)
  - ▶ POS (RFC 1619 / RFC 1662)
  - ▶ APS support (K1, K2 bits)

- Ethernet **11**
- ▶ 10 BASE-T/100 BASE-TX/1000 BASE-T and 1000 BASE-X
  - ▶ Duplex 1000 Mbps port
  - ▶ Automatic fiber or copper interface selection


### Telecom Clock

- 8**
- ▶ 8 KHz to 19.44 MHz PLL
  - ▶ Meets TR62411, ETS300 011 and GR-1244 for Jitter/Wander for Stratum 3 and higher
  - ▶ 8 KHz selectable from backplane or any STM-1/STS-3c port
  - ▶ 8 KHz reference output to backplane
  - ▶ Locks to 8 KHz +/- 100 ppm

### Software Model

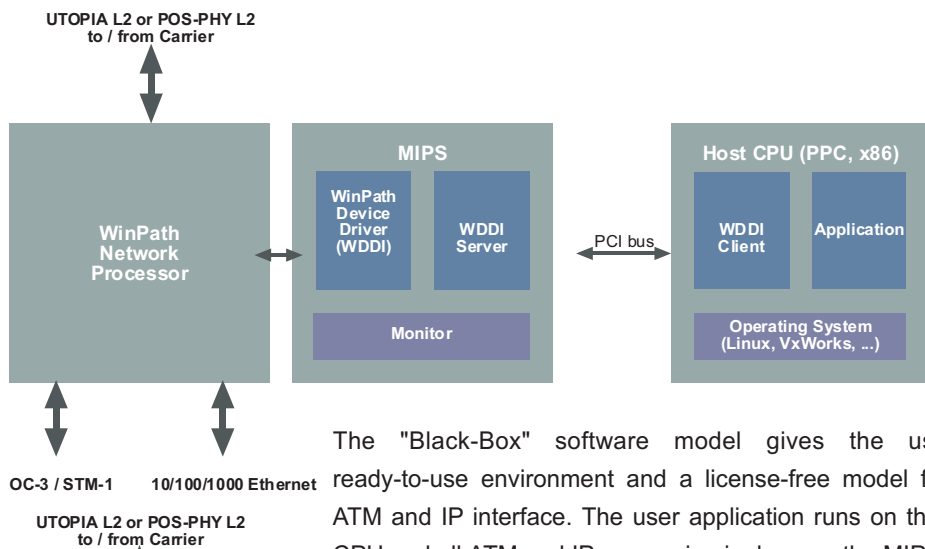

The "Black-Box" software model gives the user a ready-to-use environment and a license-free model for the ATM and IP interface. The user application runs on the host CPU and all ATM and IP processing is done on the MIPS.

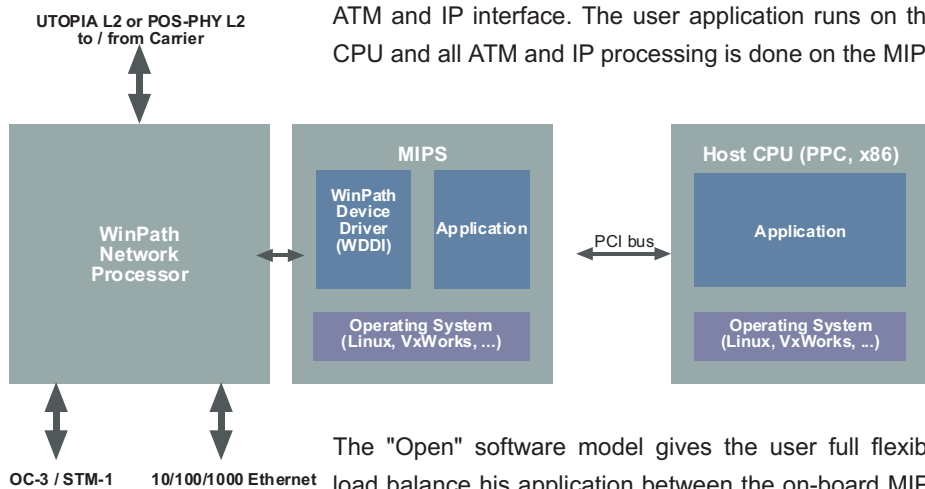

The "Open" software model gives the user full flexibility to load balance his application between the on-board MIPS and the CPU on the carrier card. The WDDI and the BSPs for the different operating systems are available in source code.

### Optical Transceivers

- 9**
- ▶ Multisource agreement (MSA) compliant SFP package
  - ▶ LC duplex receptacle connector
  - ▶ Hot pluggable electrical interface
  - ▶ Customers can buy the transceivers directly from their selected suppliers
  - ▶ One PMC card for all variants: Multimode, singlemode, short, intermediate and long reach

### Debug Connector

- 10**
- ▶ 14 points Enhanced JTAG port for debugging (software breakpoints, single step mode)
  - ▶ Easy to fit optional connector

XALYO SYSTEMS

# XS-1000

## 155 Mbps ATM/POS & GE Interface

### Specifications

Form factor .....	PTMC Option 4
Dimensions .....	74 mm x 149 mm
PCI bus .....	32-bit, 33 and 66 MHz
Host bus .....	64-bit, 66 MHz
UTOPIA bus .....	8 and 16-bit, 50 MHz, L2
POS-PHY bus .....	8 and 16-bit, 50 MHz, L2
Optical connector .....	LC duplex
Telecom reference clock .....	8 Khz
Communication ports .....	OC-3/STM-1 10 BASE-T/100-BASE-TX/ 1000 BASE-T/1000 BASE-X
UART .....	RS232
Protocols .....	ATM and IP
Flash memory .....	16 MBytes, 150 ns
Host memory .....	128 MBytes, 66 MHz
Parameter memory .....	128 MBytes, 100 MHz
Packet memory .....	128 MBytes, 100 MHz
Operating systems .....	Linux, VxWorks®
Operating temperature .....	0 to 55°C
Storage temperature .....	-40 to 85°C
Relative humidity .....	5% to 90% non-condensing
Altitude .....	0 to 15'000 ft
Power consumption .....	8.5 W max 3.3 V ..... 4.5 W max 5.0 V ..... 4.0 W max

### Standards compliance

PCI .....	PCI Local Bus Specification Rev. 2.2
IEEE P1386 .....	CMC: Common Mezzanine Card
IEEE P1386.1 .....	PMC: PCI Mezzanine Card
IEEE 1149.1 .....	JTAG
IEEE 802.3 .....	CSMA/CD (Ethernet)
PICMG® 2.15 .....	PTMC: PCI Telecom Mezzanine Card (without POS-PHY interface)
MSA SFP .....	MultiSource Agreement SFP
RFC 1483 .....	Multiprotocol Encapsulation over AAL5
RFC 1577 .....	Classical IP and ARP over ATM
RFC 1619 .....	PPP over SONET/SDH
RFC 1661 .....	The Point-to-Point Protocol (PPP)
RFC 1662 .....	PPP in HDLC-like Framing
RFC 2474 .....	Definition of the Differentiated Services Field in the IPv4 and IPv6 Headers
RFC 2475 .....	An Architecture for Differentiated Services
RFC 2615 .....	PPP over SONET/SDH
RFC 2684 .....	Multiprotocol Encapsulation over AAL5
ITU-T I.432 .....	B-ISDN User-Network Interface
ITU-T I.363.1 .....	B-ISDN ATM Adaptation Layer Type 1
ITU-T I.363.2 .....	B-ISDN ATM Adaptation Layer Type 2
ITU-T I.363.5 .....	B-ISDN ATM Adaptation Layer Type 5
ITU-T I.366.1 .....	Segmentation and Reassembly Service Specific Convergence Sublayer for the AAL type 2
ITU-T I.610 .....	B-ISDN Operation and Maintenance Principles and Functions
ITU-T G.703 .....	Physical/electrical Characteristics of Hierarchical Digital Interfaces
ITU-T G.707 .....	Network Node Interface for the Synchronous Digital Hierarchy (SDH)
ITU-T G.781 .....	Synchronization Layer Functions
ITU-T G.783 .....	Characteristics of Synchronous Digital Hierarchy (SDH) Equipment Functional Blocks
GR-253-CORE .....	SONET Transport Systems: Common Generic Criteria.
GR-1244 .....	Clocks for the Synchronized Network: Common Generic Criteria
ATM Forum TM4.1 ..	Traffic Management

### Why choose XS-1000 ?

#### **XS-1000: A Flexible Solution**

XS-1000 brings even more flexibility to the concept of PMC with the use of a network processor which is entirely re-configurable to support new standards. The PTMC standard adds modularity to the way building blocks are connected together at the system level. The use of SFP optical transceivers also gives flexibility to the user since the connector type can be chosen on a per application basis without any hardware modification.

#### **XS-1000: A High Performance Solution**

XS-1000 architecture improves the overall throughput by segmenting and reassembling packets on the PMC itself. This allows maximizing PCI bandwidth and reaching performance levels that are impossible to achieve on conventional designs. As all the resources are dedicated for the ATM and IP traffic in a deterministic way, XS-1000 data rates are more reliable, resulting in better quality of service.

#### **XS-1000: A Scalable and Coherent Solution**

XS-1000 is the second member of a family of interfaces implementing data rates from E1/T1 to OC-12 and Gigabit Ethernet, all using the same architecture, thus giving the same look and feel to the user.

#### **XS-1000: A Modern Solution**

Xalyo Systems' ATM and IP interfaces are based on a leading edge network processor handling all the data path in hardware while the control path is handled by a processor running VxWorks® or LINUX. An open API is provided on the PCI bus which makes the solution plug and play on virtually any platform, any processor, and any operating system.

### Ordering Information

XS-1000	1 x 155 Mbps ATM/POS port, 1 x 10/100/1000 Base-T Ethernet electrical and 1000 Base-X Ethernet optical port, 200 MHz, 384 MB SDRAM, 16 MB Flash
XS-TP001	OC-3/STM-1 multi mode SFP transceivers
XS-TP002	OC-3/STM-1 single mode IR SFP transceivers
XS-TP003	OC-3/STM-1 single mode LR SFP transceivers
XS-TP007	Gigabit Ethernet single mode SFP transceivers

Copyright © 2003-2005 Xalyo Systems, LC. All rights reserved. Printed in Switzerland. All trademarks mentioned in this document are the property of their respective owners.

02/05

ver 1.0/2

Xalyo Systems  
Grenier 9  
CH 1291 Commugny  
Tel: +41 22 776 61 77  
Fax: +41 22 776 61 75  
Email: [info@xalyo.com](mailto:info@xalyo.com)  
Web: [www.xalyo.com](http://www.xalyo.com)

XALYO SYSTEMS