

syn1588®

syn1588® VMS light Visual Measurement System

Advance Information - Brief Data Sheet

Version 1.0 – October 2016

Features

- Multi-channel 1 PPS measurement system
- 4 ns resolution
- +/-4 ns accuracy
- 5 channels
- 50 Ω termination and ESD protection for every channel
- LVCMOS levels supported
- Minimum pulse width 50 ns
- Maximum pulse width 500 ms
- User configurable real-time graphic display of 1 PPS signals
- User configurable real-time graphic display of MTIE, TDEV, and ADEV
- Separate data and histogram files generated per channel for external post processing.
- Online statistical data (mean value and standard deviation)
- Online channel status display
- Channel management via configuration file
- Web-based remote display of 1 PPS offset
- Fully automated online checker function
 - User-programmable boundaries
- Alerting if channel enters/leaves accuracy boundaries
- Optional OCXO oscillator option



syn1588® VMS light - Visual Measurement System

Advance Information


The syn1588® VMS light – Visual Measurement System is a multi-channel, high resolution, high accuracy 1 PPS data acquisition unit for analyzing the synchronization behavior of multiple devices. It comprises of a syn1588® PCIe NIC acting as a syn1588® 1 PPS acquisition card capable of measuring up to five input channels. Each input is able to sample signal transitions at a resolution of 4 ns.

The syn1588® 1 PPS acquisition card accepts 1 PPS signals at LVCMOS levels with a minimum pulse width of 50 ns and a maximum pulse width of 500 ms, respectively. Every channel offers 50 Ω passive termination and appropriate ESD protection.

In capture mode the syn1588® VMS light samples all channels once every second. In case a signal transition is detected a validation process is started: If the offset is within definable bounds for more than a given number of consecutive samples, data capturing is enabled for the respective channel. Likewise capturing is disabled, if the data remains out of bounds for a given period of time.


Apart from graphically displaying the offset in real-time statistical data (mean value, standard deviation, minimum and maximum value) is calculated as well. Furthermore MTIE, TDEV, and ADEV are calculated and displayed graphically.

All relevant channel information is user configurable via a configuration file. On-line updates of channel characteristics while running syn1588® VMS light will be updated in the configuration file as well.

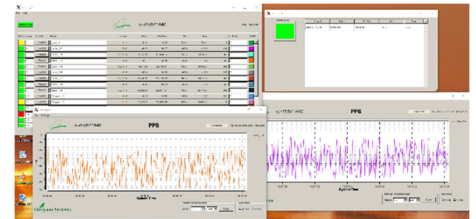

The syn1588® VMS light can be used for any kind of long or short term measurements in the area of clock synchronization. Due to its extensive observation features, the syn1588® VMS light is capable of reporting any outliers, abnormalities or disturbances in the synchronization performance via email, scripts or any other user defined mechanism. A typical usage scenario is the monitoring of an Ethernet network using the Precision Time Protocol (PTP, IEEE 1588): By connection all PTP nodes to the syn1588® VMS light via a 1 PPS signal, performance reports, statistics as well as various diagrams are displayed and stored on the measurement system.

The syn1588® VMS light is delivered ready to be used with 5 channels pre-assembled in a 19" rack 1HE mounted server with Linux and all necessary software pre-installed.



syn1588®

syn1588® VMS light Visual Measurement System

Advance Information - Brief Data Sheet

Version 1.0 – October 2016

Technical Specifications	
Standards	IEEE 802.3-2000 IEEE 1588-2008 PCI Express interface & signaling
Installable PCI slot	1x PCI Express 1/2/4/8/16 lane slot per 4 channels
Storage temperature	-40°C to 85°C
Operating temperature	0 to 50°C
Humidity	5% to 80% non-condensing



The Flavour of Excellence

Franzosengraben 8
A-1030 Vienna
Austria
<http://oregano.at>
contact@oregano.at

Copyright © 2016

Oregano Systems – Design & Consulting GmbH

ALL RIGHTS RESERVED.

Oregano Systems does not assume any liability arising out of the application or use of any product described or shown herein nor does it convey any license under its patents, copyrights, or any rights of others.

Licenses or any other rights such as, but not limited to, patents, utility models, trademarks or tradenames, are neither granted nor conveyed by this document, nor does this document constitute any obligation of the disclosing party to grant or convey such rights to the receiving party.

Oregano Systems reserves the right to make changes, at any time without notice, in order to improve reliability, function or design. Oregano Systems will not assume responsibility for the use of any circuitry described herein.

All trademarks used in this document are the property of their respective owners.